



## 1064nm Faraday Mirror

### Key Features

- High Isolation
- Low Insertion Loss
- High Return loss
- Compact Size
- Epoxy Free Optical Path

The Faraday Mirror is a passive device that provides 45- or 90-degree rotation regarding to the polarization state of the input light. It is a fiber optic polarization rotation mirror designed for fiber optic networks and measurement applications. The device can help to eliminate polarization sensitivity of an optical fiber system. Applications include eliminating polarization induced fluctuations in fiber interferometers, Brillouin amplifier systems, fiber laser systems, and fiber optic antenna remoting systems. Our Faraday Mirror is optical path epoxy free and thus offers low insertion loss and high temperature stability.

### Applications

- Fiber Optical Amplifier
- Fiber optic Systems Testing
- Fiber optic LAN Systems
- Telecommunications



## For more Info

### Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: [sales@dkphotonics.com](mailto:sales@dkphotonics.com)

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

### Package Dimension

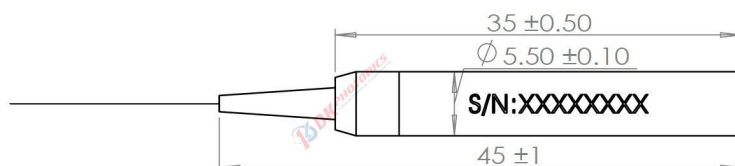

\*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

## 1064nm Faraday Mirror

### Performance Specifications

| Parameter  | Unit   | Values                   |
|--|--------|--------------------------|
| Center Wavelength  | nm     | 1064                     |
| Operating Bandwidth                                      | nm     | ±5                       |
| Max. Insertion Loss                                      | dB     | 3.0(45deg.), 5.0(90deg.) |
| Faraday Rotation Angle (Single Pass)                     | degree | 45 or 90                 |
| Rotation Angle Tolerance over Wavelength and Temperature | degree | +/-3.0, +/-4.0           |
| Max. PDL   | dB     | 0.10                     |
| Max. Optical Power                                       | mW     | 150                      |
| Fiber Type   | -      | 1060-XP                  |
| Operation Temperature                                    | °C     | -5 ~ +70                 |
| Storage Temperature                                      | °C     | -40 ~ +85                |
| Dimensions   | mm     | Ø5.5xL35                 |

1. Above specification are for device without connector, and may change without notice.

### Order information

P/N: FM-①-②-③-④-⑤-⑥

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail.

| ①          | ②                      | ③               | ④                    | ⑤            | ⑥          |
|------------|------------------------|-----------------|----------------------|--------------|------------|
| Wavelength | Faraday Rotation Angle | Dimensions      | Pigtails Diameter    | Fiber Length | Connector  |
| 64:1064nm  | 45:45°                 | 1: Ø5.5mmxL35mm | 25:250µm bare fiber  | 05:0.5m      | 00:None    |
| XX: Others | 90:90°                 |                 | 90:900µm Loose Fiber | 10:1.0m      | FP: FC/PC  |
|            |                        |                 | XX: Others           | 15:1.5m      | FA: FC/APC |
|            |                        |                 |                      | XX: Others   | SA: SC/APC |
|            |                        |                 |                      |              | LA: LC/APC |
|            |                        |                 |                      |              | XX: Others |

**Part Number Example:** FM-64-45-1-90-10-00

**Description:** 1064nm Faraday Mirror, Faraday rotation angle: 45°, Ø5.5xL35mm package, with 0.9mm OD loose tube, 1.0m length fiber pigtails, and no connectors at all ports.

### Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.