

980/1064nm SM WDM/Tap Coupler Hybrid Combination


Key Features

- Compact Size
- Low insertion loss
- High channel Isolation
- High Extinction Ratio
- High stability and reliability

DK Photonics' WDM/Tap Coupler Hybrid Combination is a combination of a wavelength division multiplexer and tap coupler in a compact package. All input and output fibers are polarization maintaining. This product has an extremely low insertion loss, a very stable tap-coupling ratio, high isolation, and high return loss. This product offers integrated solution to amplifier application by combining more functions into a very compact package.

Applications

- Fiber laser
- Fiber amplifier
- Fiber Sensor
- Laboratory R&D

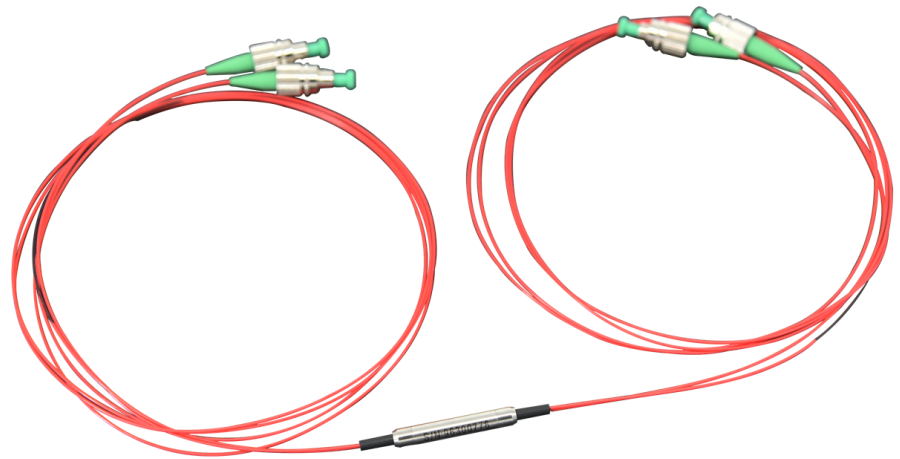

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,
 Dahe Road, Longhua Dis.,
 Shenzhen, China 518109

Package Dimension:

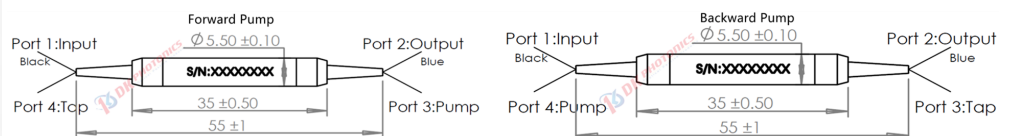

PS: For forward pump, signal wavelength is polarization independent. For backward pump, signal wavelength is Polarization dependent.

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

980/1064nm SM WDM/Tap Coupler Hybrid Combination
Performance Specifications

Parameter	Unit	Values	
Signal Central Wavelength (λ_c)	nm	1030, 1040, 1064	
Signal Wavelength Range	nm	1025~1080	
Max. Excess Loss, λ_c , @ 23°C	nm	1.0	
Tap Ratio	%	1~50	
Tap Channel Typ. Loss	dB	1%(19.0~21.0), 2%(16.2 ~ 19.0), 5%(12.2 ~ 15.0)	
Min. Isolation (WDM)	Signal Channel	dB	25
	Pump Channel	dB	12
Pump Wavelength Range	nm	960~990	
Max. Insertion Loss (Pump to Common)	dB	0.7	
Max. PDL	dB	0.1	
Min. Return Loss	dB	50	
Max. Power Handling (CW)	W	0.5, 2, 3, 10	
Max. Peak Power for Pulse	kW	1, 5, 10	
Max. Tensile Load	N	≤5	
Fiber Type	-	1060-XP	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	
Package Dimensions	mm	Ø5.5 x L35	

- Above specifications are for device without connector.
- For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Power transmits through the connector less than 2W.
- If there is pulse application, please be sure to inform us of pulse energy and peak power.

Order information P/N: WTH -①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250 μ m bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦
Wavelength	Optical Power	Tap Ratio	Pump Configuration	Pigtail Diameter	Fiber Length	Connector
49:1040 signal/980 pump	L:<0.5W 2:2W	01:1% Tap 02:2% Tap	F: Forward Pump B: Backward Pump	25:250 μ m bare fiber	05:0.5m 10:1.0m	00: None FP: FC/PC
39:1030 signal/980 pump	5:5W 10:10W	05:5% Tap		90:900 μ m Loose Fiber XX: Others	15:1.5m XX: Others	FA: FC/APC SP: SC/PC SA: SC/APC XX: Others
69:1064 signal/980 pump						

Part Number Example: WTH-69-L-01-F-90-10-FA

Description: SM WDM/Tap Coupler Hybrid Combination, 1064nm signal/980nm pump, 1% tap, forward pump, with 0.9mm OD loose tube, 1.0m fiber length, and FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.