



1310nm PM Faraday Mirror

The PM Faraday Mirror is a passive device that provides 45- or 90-degree rotation regarding to the polarization state of the input light. It is a fiber optic polarization rotation mirror designed for fiber optic networks and measurement applications. The device can help to eliminate polarization sensitivity of an optical fiber system. Applications include eliminating polarization induced fluctuations in fiber interferometers, Brillouin amplifier systems, fiber laser systems, and fiber optic antenna remoting systems. Our Faraday Mirror is optical path epoxy free and thus offers low insertion loss and high temperature stability.

Key Features

- High Isolation
- Low Insertion Loss
- High Return loss
- Compact Size
- Epoxy Free Optical Path

Applications

- Fiber Optical Amplifier
- CATV Fiber optic Links
- Fiber optic Systems Testing
- Fiber optic LAN Systems
- Telecommunications



For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,


Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimension

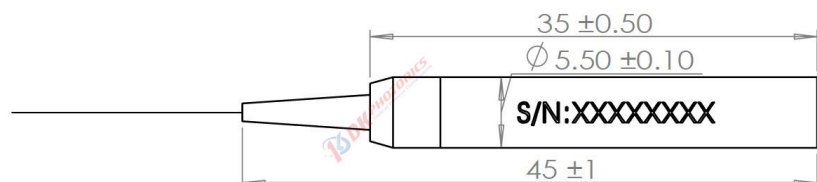

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



1310nm PM Faraday Mirror

Performance Specifications

Parameter	Unit	Values
Center Wavelength	nm	1310
Operating Bandwidth	nm	±30
Max. Insertion Loss	dB	0.6(45deg.),0.7(90deg.)
Faraday Rotation Angle (Single Pass)	degree	45 or 90
Rotation Angle Tolerance over Wavelength and Temperature	degree	+/-1.0
Min. Extinction Ratio	dB	20
Max. Optical Power	mW	500
Fiber Type	-	PM1300-XP
Operation Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions	mm	Ø5.5xL35

1. Above specification are for device without connector, and may change without notice.

2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. Power transmits through the connector less than 2W. The default connector key is aligned to slow axis.

Order information P/N: PMFM-①-②-③-④-⑤-⑥

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail.

①	②	③	④	⑤	⑥
Wavelength	Angle	Dimensions	Pigtails Diameter	Fiber Length	Connector
13:1310nm	45:45°	1: Ø5.5xL35mm	25:250µm bare fiber	05:0.5m	00: None
XX: Others	90:90°		90:900µm Loose Fiber	10:1.0m	FP: FC/PC
			XX: Others	15:1.5m	FA: FC/APC
				XX: Others	XX: Others

Part Number Example: PMFM-13-45-1-90-10-00

Description: 1310nm PM Faraday Mirror, Faraday rotation angle: 45°, Ø5.5xL35mm package, PM1300 fiber with 0.9mm OD loose tube, 1.0m length fiber pigtails, and no connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.