



Mini Size Wide Band Coupler (MSWBC)

Key Features


- Mini size
- Low excess loss
- Low PDL and low WDL
- High stability and reliability

DK Photonics uses bandwidth expanding techniques (asymmetric techniques) to build the wide band coupler(WBC). The WBC has an operating bandwidth of $\pm 40\text{nm}$, low excess loss and PDL.

The mini size WBC is designed for the compact optical modules and communication systems.

Applications

- Mini size EDFA
- Mini size transmitter/receiver module
- Optical communication systems
- Testing instruments

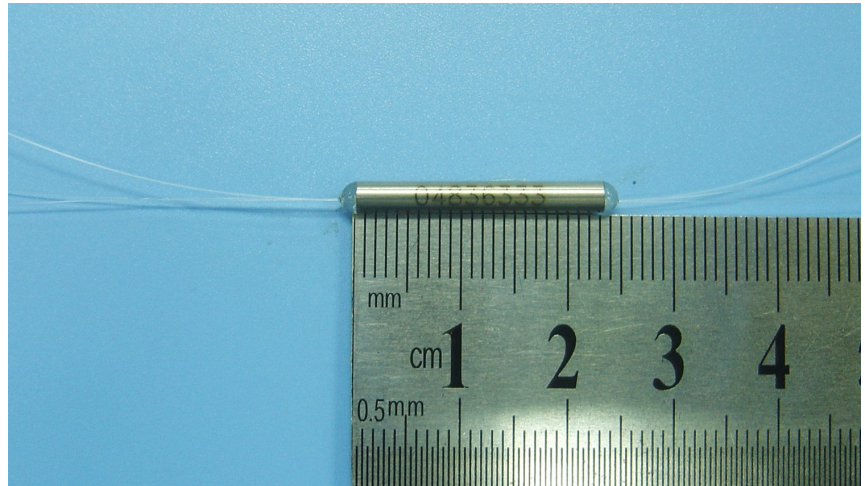

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimension

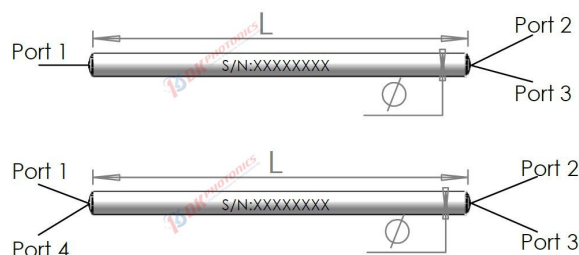

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

Mini Size Wide Band Coupler (MSWBC)

Performance Specifications

Parameter	Unit	Values			
Operating wavelength	nm	1310 or 1550, others on request			
Operating bandwidth	nm	±40			
Configuration	-	1×2 or 2×2			
Package size (Φ×L)	mm	Φ3.0/Φ2.4×30		Φ2.4×25	
Grade	-	P	A	P	A
Typical excess loss	dB	0.1	0.15	0.15	0.25
50/50	dB	≤3.50	≤3.70	≤3.60	≤3.80
40/60	dB	≤4.50/2.70	≤4.80/2.90	≤4.60/2.80	≤4.90/3.00
30/70	dB	≤5.80/2.00	≤6.10/2.10	≤5.90/2.10	≤6.30/2.20
20/80	dB	≤7.70/1.25	≤8.00/1.30	≤7.80/1.30	≤8.20/1.40
Insertion loss	dB	9.55~10.85/≤0.70	9.25~11.15/≤0.85	9.60~10.90/≤0.75	9.30~11.20/≤0.85
5/95	dB	12.40~14.00/≤0.45	12.10~14.35/≤0.55	12.45~14.05/≤0.50	12.15~14.40/≤0.55
3/97	dB	14.50~16.35/≤0.35	14.10~16.75/≤0.45	14.55~16.40/≤0.40	14.15~16.80/≤0.45
2/98	dB	16.15~18.25/≤0.30	15.65~18.70/≤0.35	16.20~18.30/≤0.35	15.70~18.75/≤0.40
1/99	dB	19.05~21.35/≤0.25	18.55~21.85/≤0.30	19.10~21.40/≤0.30	18.60~21.90/≤0.35
PDL	dB	≤0.1	≤0.15	≤0.1	≤0.15
Directivity	dB	≥50			
Maximum Power Handling	W	1			
Operating temperature	°C	-40 ~ +85			

1. Above specification are for device without connector, and may change without notice.
2. Other specifications can be made on customer request.
3. IL is 0.3 dB higher and RL is 5 dB lower for each connector added.

Order information P/N: FBTC-①-②-③-④-⑤-⑥-⑦-⑧-⑨-⑩

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail. For mini size coupler, typical applications are bare fibers without connector.

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
Type	Grade	Port	Wavelength	Coupling Ratio (%)	Fiber Type	Pigtails Diameter	Fiber Length	Connector	Package
MSWBC	P: P	102:1x2	1315:	50:50/50	S28:SMF-28	25:250μm	05:0.5m	00:None	2.4x25
	Grade	202:2x2	1310&1550nm	40:40/60	X:Others		10:1.0m	FP: FC/PC	2.4x30
	A:A			30:30/70			15:1.5m	FA: FC/APC	3.0x30
	Grade			20:20/80			XX: Others	SP: SC/PC	
				10:10/90				SA: SC/APC	
				05:5/95				ST: ST/PC	
				02:2/98				LP: LC/PC	
				01:1/99				LA: LC/APC	
				XX: Others				XX: Others	

Part Number Example: FBTC-MSWBC-P-202-1315-01-S28-25-10-00-2.4x25

Description: 2x2 mini size wide band coupler, P grade, 1310&1550nm, 1/99 coupling ratio, SMF-28e fiber, with bare fiber, 1.0m length fiber pigtails, without connector. Φ2.4x25mm package.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.