

1xN (2xN) Single Mode Coupler Module(1900~2100nm)

Key Features

- Low Insertion Loss
- Low Polarization Dependent Loss
- All Split Ratios Available
- High stability & Reliability

1xN (2xN) coupler splitter modules are cascaded with the single mode couplers. These couplers are available in a wide range of split ratios, lengths, and packaging. Custom terminations are also available.

Applications

- Fiber Laser
- Fiber amplifier
- Fiber sensors
- Testing Instrumentations



For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,
Dahe Road, Longhua Dis.,
Shenzhen, China 518109

Package Dimension

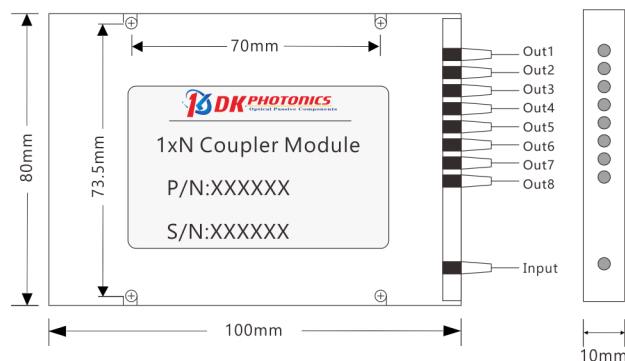

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

1xN (2xN) Single Mode Coupler Module(1900~2100nm)
Performance Specifications

Parameter	Unit	N×4, N=1, 2		N×6, N=1, 2		N×8, N=1, 2	
Operating wavelength	nm	1900,1950,1970,2000,2050, others on request					
Operating bandwidth	nm	±15					
Grade	-	P	A	P	A	P	A
Insertion loss(even coupling ratio)	dB	≤7.2	≤7.6	≤9.3	≤9.9	≤10.7	≤11.3
Typical excess loss	dB	0.3		0.4		0.5	
PDL	dB	≤0.25		≤0.35		≤0.35	
Return Loss	dB	≥50					
Directivity	dB	≥55					
Max. Optical Power (CW)	W	0.5 ,2, 5					
Fiber Type	-	SMF-28e, SM1950 or other					
Operating Temperature	℃	-20~+75					
Storage Temperature	℃	-40~+85					
Package Dimension	mm	100x80x10 (ABS)					

1. Above specification are for device without connector, and may change without notice. All parameters are tested at room temperature.
2. Other specifications can be made on customer request.
3. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower.
4. If there is pulse application, please be sure to inform us of pulse energy and peak power.

Order information P/N: FBTC-①-②-③-④-⑤-⑥-⑦-⑧-⑨

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦	⑧	⑨
Grade	Port	Wavelength	Power Handling	Coupling Ratio(%)	Fiber Type	Pigtails Diameter	Fiber Length	Connector
P: P Grade	104:1x4	1900:1900nm	L:<0.5W	EV:even	S28: SMF-28e	25:250μm	05:0.5m	00: None
A:A Grade	204:2x4	1950:1950nm	2:2W	XX: Others	S19:SM1950	90:900μm	10:1.0m	FP: FC/PC
	106:1x6	2000:2000nm	5:5W		X: Others	XX: Others	15:1.5m	FA: FC/APC
	206:2x6	2050:2050nm	10:10W 20:20W				XX: Others	LA: LC/APC
	108:1x8	XX: Others						XX: Others
	208:2x8							
	Etc.							

Part Number Example: FBTC-P-104-1950-L-EV-S19-90-10-FA

Description: 1X4 Single Mode Coupler Module, 1950nm, P grade,1x4, 0.5w handling power, even coupling ratio, SM1950 fiber, with 0.9mm OD loose tube,1.0m length fiber pigtails, FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.