



2000nm In-line Faraday Rotator

The In-line Faraday Rotator is characterized with low IL, high return loss, high extinction ratio and excellent environmental stability and reliability. It is with fiber in and fiber out. They are ideal for polarization maintaining fiber amplifiers, fiber lasers, and high-speed communication system and instrumentation applications.

Key Features

- Low insertion loss
- Excellent stability and reliability
- High power handling

Applications

- Fiber laser
- Fiber amplifier
- Communications



For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimension

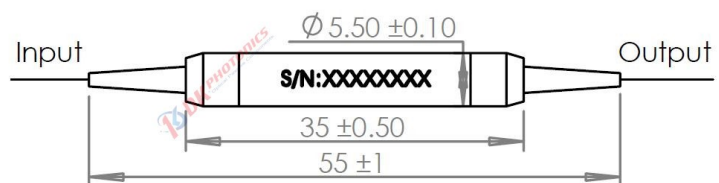

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



2000nm In-line Faraday Rotator

Performance Specifications

Parameter	Unit	Values
Center Wavelength	nm	2000
Operating Bandwidth	nm	±30
Faraday Rotation Angle (Single Pass)	degree	45 or 90
Rotation Angle Tolerance over Wavelength and Temperature	degree	±2.0
Max. Insertion Loss	45 deg.	0.8
	90 deg.	1.0
Min. Extinction Ratio	dB	20
Min. Return Loss	dB	≥50/50
Max. Optical Power	mW	300
Fiber Type	Option 1: PM→PM	PM1550/PM1950→PM1550/PM1950
	Option 2: SM→PM	SMF-28e/SM1950→PM1550/PM1950
	Option 3: SM→SM	SMF-28e/SM1950→SMF-28e/SM1950
Operation Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions	mm	Ø5.5xL35

- Above specifications are for device without connector.
- For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. The default connector key is aligned to slow axis. Power transmits through the connector less than 2W.
- Higher power up to 20W is possible; please contact DK Photonics for details.
- Default fiber is SMF-28e/PM1550 for 2um.

Order information P/N: ILFR-①-②-③-④-⑤-⑥

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail.

①	②	③	④	⑤	⑥
Wavelength	Angle	Fiber Type	Pigtails Diameter	Fiber Length	Connector
2000:2000nm	45:45°	1: Option 1	25:250µm bare fiber	05:0.5m	00: None
XX: Others	90:90°	2: Option 2	90:900µm Loose Fiber	10:1.0m	FP: FC/PC
		3: Option 3	XX: Others	15:1.5m	FA: FC/APC
				XX: Others	XX: Others

Part Number Example: ILFR-2000-45-1-90-10-FA

Description: 2000nm in line Faraday Rotator, faraday rotation angle: 45°, PM1950 fiber in and PM1950 fiber out, with 0.9mm OD loose tube, 1.0m length fiber pigtails, FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.