



2050nm PM Fiber Mirror Reflector

Key Features

- Low Insertion Loss
- Low Polarization Sensitivity
- Optical Path Epoxy Free

PM Fiber Mirror Reflectors are used to reflect the light emerging from a fiber back in the reverse direction. They are used to build fiber interferometers, or with fiber fused splitters to measure back reflection within fiber optic components. They can also be used to measure the sensitivity of sources to back reflection from other devices, by providing reference reflection levels. This is very useful for deriving back reflection specifications for transmitters.

PM Fiber Mirror Reflector consist of a PM fiber optic collimator and a mirror. The design reflectivity of the mirror itself is >99%, but due to the insertion loss of the fiber coupling of the collimator, we distinguish several mirrors with different reflectivity.

Applications

- Fiber optic Amplifiers
- Fiber optic Testing Systems
- Telecommunications



For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,


Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimensions

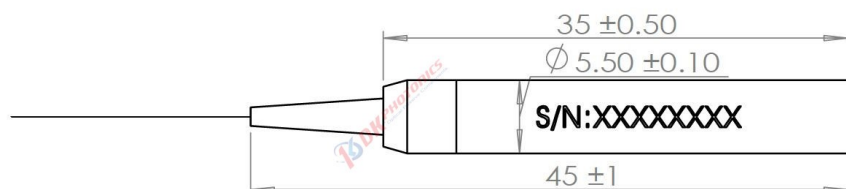

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



2050nm PM Fiber Mirror Reflector

Performance Specifications

Parameters	Unit	FMR
Operating Wavelength	nm	2050
Operating Bandwidth	nm	±30
Reflectivity	%	>90
Insertion Loss	dB	≤0.5
PER	dB	≥20
Optical Power	mW	≤500
Fiber Type	-	PM1550(default) or PM1950 panda fiber
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimension	mm	Φ5.5×L35

1. Above specification are for device without connector, and may change without notice.

2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. Power transmits through the connector less than 2W. The default connector key is aligned to slow axis.

Order information P/N: PMFMR-①-②-③-④-⑤-⑥

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥
Wavelength	Reflectivity	Package	Pigtails Diameter	Fiber Length	Connector
2050:2050nm	90:90%	1: Φ5.5×L35	25:250μm bare fiber	08:0.8m	00: None
XX: Others		X: Others	90:900μm Loose Fiber	10:1.0m	FP: FC/PC
			XX: Others	XX: Others	FA: FC/APC
					XX: Others

Part Number Example: PMFMR-2050-90-1-90-10-FA

Description: 2050nm PM Fiber Mirror Reflectors, Reflectivity>90%, Ø5.5xL35mm package, with 0.9mm OD loose tube,1.0m length fiber pigtails, FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.