



## 780nm 1x3 Fused PM Fiber Splitter

### Key Features



- Low Insertion Loss
- High Extinction Ratio
- Compact In-Line Package
- Available for Slow or Fast Axis Operation
- High Stability and Reliability

DK Photonics uses unique fusing technique and polarization maintaining fiber to build the 1x3 monolithic fused PM fiber standard splitter. The coupling ratio could be selected according to customer's request. It features low excess loss, small size and high polarization extinction ratio. 1x3 monolithic fused PM fiber standard splitter is widely used for optical sensors and optical gyro.

If you do not see a standard PM Fused Coupler that meets your needs, we welcome the opportunity to review your desired specification and quote a custom PM fused Coupler. Requests for custom fiber pigtailed, different wavelengths, tap Ratio and handling power of operation or other specific needs will be readily addressed.

### Applications

- Fiber Optic Instruments
- Fiber Amplifiers
- Fiber Sensors
- Coherent Detecting
- Research

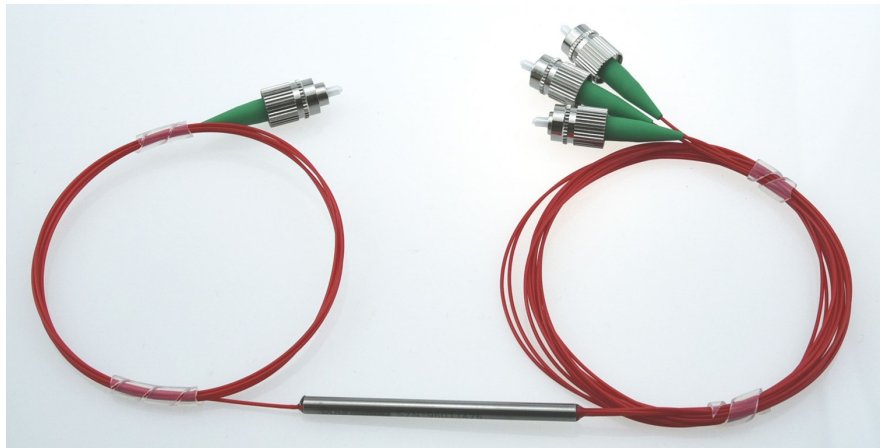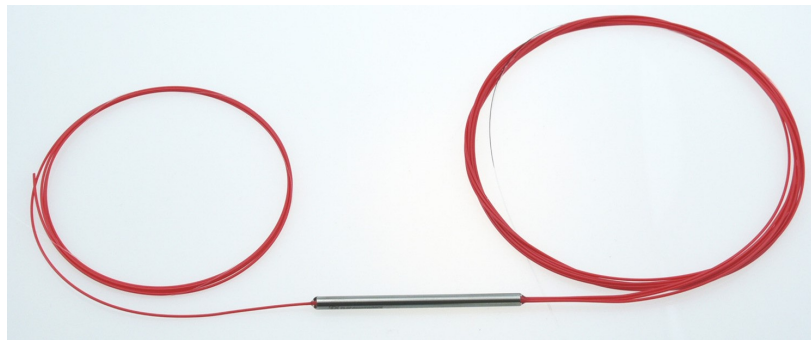

## For more Info

### Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: [sales@dkphotonics.com](mailto:sales@dkphotonics.com)

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

### Splitting Ratio Tolerance

Coupling Ratio	Maximum Splitting Ratio Tolerance (%)			
	Premium		A Grade	
	Through Port	Coupling Port	Through Port	Coupling Port
40/20/40	±5.0	±6.0	±6.0	±7.0
35/30/35	±4.0	±5.0	±5.0	±6.0
33/33/33	±6.0	±6.0	±8.0	±8.0
30/40/30	±4.0	±3.0	±5.0	±4.0
25/50/25	±3.5	±2.4	±4.0	±3.0
20/60/20	±3.3	±2.0	±3.7	±2.5
15/70/15	±3.0	±1.8	±3.5	±2.4
10/80/10	±2.8	±1.6	±3.2	±2.0
5/90/5	±2.5	±1.5	±3.0	±1.8



## 780nm 1x3 Fused PM Fiber Splitter

### Performance Specifications

Parameter	Unit	Values
Port Configuration	-	1x3
Grade	-	P grade                      A grade
Central Wavelength	nm	780
Bandwidth	nm	±10
Excess Loss	Typ.	dB                      0.6                      0.8
	Max.	dB                      0.8                      1.0
PER for Through Port	dB	≥17                      ≥15
Directivity	dB	55
Max. Power Handling	W	0.5, 2, 3, 5
Max. Tensile Load	N	5
Fiber Type	-	PM780-HP Panda fiber or other
Operating Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions (Φ×L)	mm	Φ4.0×60(0.9mm tube), Φ3.0×60 (bare fiber)

- Above specifications are for device without connector, and the PM fused coupler is both axis working, no axis can be blocked; default test extinction ratio is on the slow axis. All parameters are tested at room temperature.
- For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. Power transmits through the connector less than 2W. The default connector key is aligned to slow axis.
- For >10W high power applications, we will use heat sink package, contact DK Photonics for details.
- If there is pulse application, please be sure to inform us of pulse energy and peak power.

### Order information      P/N: PMFBTC-①-②-③-④-⑤-⑥-⑦-⑧-⑨

When you inquire, please provide the correct P/N number according to our ordering information and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦	⑧	⑨
Grade	Port	Operating Wavelength	Power Handling	Coupling Ratio	Fiber Type for Tap Port (>5%)	Fiber Diameter	Fiber Length	Connector
P: P grade A: A grade	103:1x3	78: 780nm XX: Others	L:<0.5W 2:2W 5:5W 10:10W	40/20/40    20/60/20 35/30/35    15/70/15 33/33/33    10/80/10 30/40/30    5/90/5 25/50/25    XX: Others	0: SM fiber 1: PM Panda fiber	25:250μm bare fiber 90:900μm Loose tube XX: Others	08:0.8m 10:1.0m XX: Others	00: None FP: FC/PC FA: FC/APC SP: SC/PC SA: SC/APC LP: LC/PC LA: LC/APC XX: Others

**Part Number Example:** PMFBTC-P-202-2050-1-50-1-90-10-FA

**Description:** 2050nm 2x2 PM Fiber Fused Coupler, P grade, 1W, 50:50 coupling ratio, 1.0m PM1950 panda fiber with 0.9mm OD loose tube, and FC/APC connectors at all ports.

### Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.