




915nm MM Pump Laser Protector

Key Features

- Low Insertion Loss
- High Power Handling
- High Isolation
- Low Cost
- High Reliability
- Excellent Temperature Stability

The Pump Laser Protector, also called Pump Protection Filter, is a passive component which allows maximum transmission from a discrete fibre-coupled pump laser diode and blocks parasitic signals around the centre wavelength of the laser from being reflected back into the laser. Depending on the fiber type of laser diode, we have SM Pump Laser Protector, PM Pump Laser Protector, MM Pump Laser Protector. They can work for 1.0 μ m fiber laser and 1.5 μ m fiber laser.

If you do not see a standard Pump Laser Protector that meets your needs, we welcome the opportunity to review your desired specification and quote a custom isolator. Requests for custom fiber pigtailed, different wavelengths and handling power of operation or other specific needs will be readily addressed.

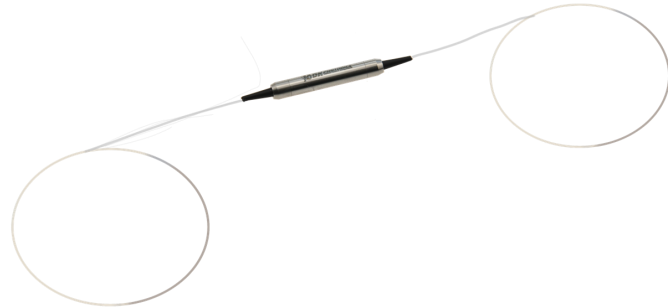


Applications


- Fiber Amplifiers
- Fiber lasers
- Test and Measurement
- Instrumentation




Package Dimension

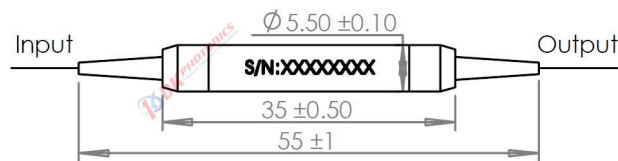

Dimension for <10W

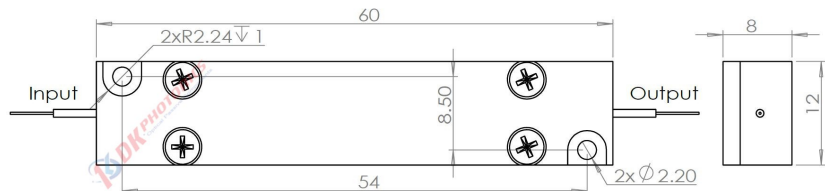

Dimension for <30W

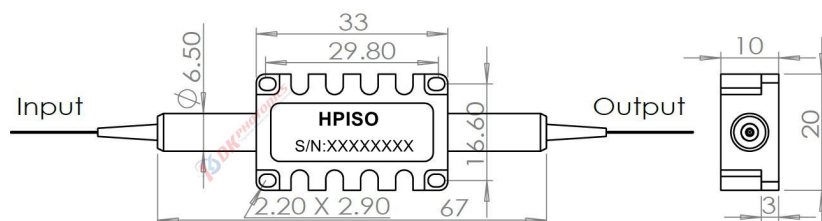

Dimension for 50W

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



915nm MM Pump Laser Protector

Performance Specifications

Parameters	Unit	Values
Pump Laser Center Wavelength	nm	915,940
Operating Wavelength Range	nm	± 15
Typ. Pump Insertion Loss	dB	0.4
Max. Pump Insertion Loss (-5~70°C)	dB	0.6
Max. PDL	dB	0.2
Operating Signal Wavelength Range	nm	1020~1120(1.0μm) or 1530~1570(1.5μm)
Min. Backward Signal Isolation	dB	30
Max. Optical Power	CW	0.5, 5, 10, 20, 30 ,50 or specify
Min. Return Loss	dB	30
Fiber Type	-	105/125, NA0.22 Multimode Fiber or Specify
Operation Temperature	°C	-5 ~ +65
Storage Temperature Range	°C	-40 ~ +85

1. Above specification are for device without connector, and may change without notice.
2. IL is 0.3 dB higher and RL is 5 dB lower for connector added.
3. The pass optical power is 2 W only for connector added.

Order information P/N: MMPLP-①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail. For high power applications, we recommend direct splicing without connectors.

①	②	③	④	⑤	⑥	⑦
Pump Laser Wavelength	Optical Power	Backward Signal Wavelength	Fiber Type	Pigtail Diameter	Fiber Length	Connector
915:915nm	01:1W	10:1064nm	XX/XX/XX	25:250μm Bare Fiber	08:0.8m	00: None
940:940nm	10:10W	15:1550nm	(core/clad/ NA)	90:900μm Loose Tube	10:1.0m	XX: Others
XX: Other	20:20W			XX: Others	XX: Other	
	30:30W					
	50:50W					
	XX: Other					

Part Number Example: MMPLP-915-20-10-105/125/22-25-08-00

Description: 915nm Multimode Pump Laser Protector, - 20W, backward signal wavelength 1064nm, 105/125um, NA0.22 fiber, with bare fiber & 0.8m length, no connector.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.